

MAILNUT 3X™ DIRECTIONS

Please Note: MAILNUT 3X™ magnet will have very strong attraction to steel mailboxes and other steel objects.

1.) FOR BEST RESULTS

For MAILNUT 3X™ to function properly, mailbox door must open and close freely.

Apply enclosed adhesive materials in temperatures between 40-85 degrees Fahrenheit. (4.4-29.4 degrees Celsius)

Be sure the surfaces for the MAILNUT 3X™ mounting pads are clean, dry, and free of loose paint, rust and debris before applying mounting pads.

Prior to attaching MAILNUT 3X™ clean each surface with enclosed alcohol pad* *Important note:* If paint and/or finish is flaking, corroding, or raised on the mounting pad mailbox surface areas use enclosed scraper/sand paper to remove debris and restore to a clean smooth metal surface and then wipe clean with enclosed alcohol pad prior to attaching mounting pads. **(Use protective eye wear and hand protection while removing loose coatings/paint etc. with sandpaper and/or scraper. *Discard alcohol pads, scraper, and sandpaper properly after use.)**

2). DIRECTIONS

1). MAILNUT 3X™ and 3M Dual Lock™ mounting pads are to be attached on the inside wall of the mailbox opposite the postal flag at the highest point with a flat surface. (See Figure 1 on back of this page).

2). Peel off the permanent stick-on* protective liners from the back of each 1" x 3" 3M™ Dual Lock™ mounting pad and attach them inside on the flat cleaned surface with the shorter edge of the 3M™ Dual Lock™ pad flush with the outside edge of the of the mailbox wall and with one 3M Dual Lock strip meeting above/below the other creating a 2" x 3" mounting pad. Press firmly into place for 60 seconds. (See Figure 2 on back of this page). * Stick-on has very fast and high bonding strength. First attempt at application should be permanent.

3). **Do not REMOVE Vinyl Protective Magnet Cover from Cylinder Magnet on MAILNUT 3X. Grip MAILNUT 3X™ firmly with fingers on outside edges while attaching it to mounting pads.** MAILNUT 3X™ magnet will have very strong attraction to steel mailboxes and other steel objects. **Then Carefully** attach MAILNUT 3X™ to the 3M™ Dual Lock™ mounting pads so the tip of magnet is positioned inside the mailbox at a point where it will contact the backside of the mailbox door when the door is fully closed. Normally, this is at the very outer edge of the side wall of the mailbox. Press the back side of the MAILNUT 3X firmly onto mounting pads so it **interlocks tightly** with the 3M™ Dual Lock™ mounting pads on the inside wall of your mailbox. (See Figure 3 on the back side of this page)

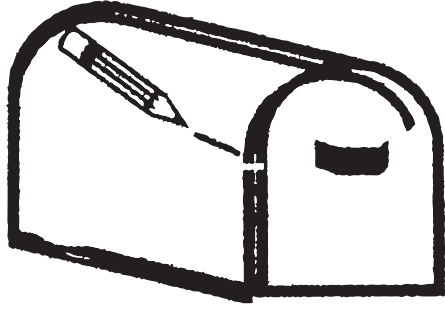


Figure 1

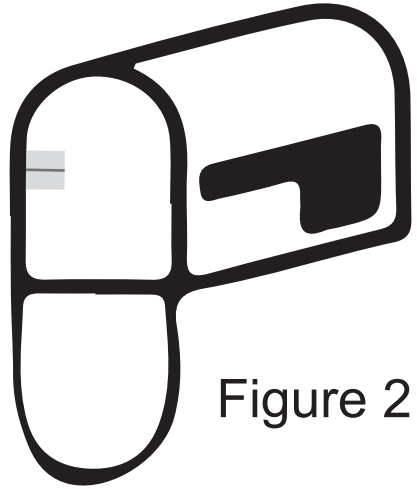


Figure 2

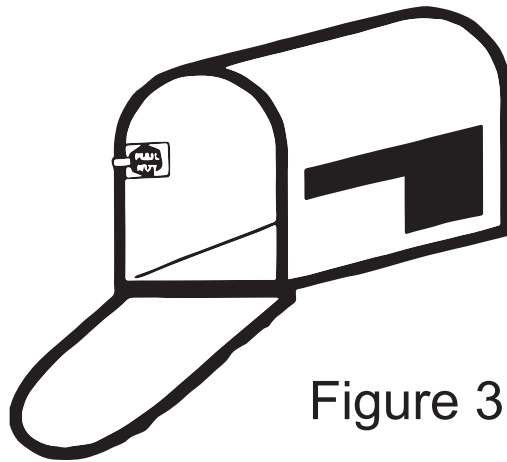


Figure 3

For Customer Support or Comments E-mail, info@MAILNUT.com or call 1-833-MAILNUT between 9:00-5:00 CST M-F Send Written Inquiries to: O'TOOP Products, LLC Attention: MAILNUT PO Box 146 New Auburn WI 54757

MAILNUT™ and the product configuration of the product contained herein are trademarks of O'TOOP Products, LLC Solely distributed by US Post® and its affiliates. *Dual Lock™ and 3M™ are trademarks of the 3M Company

Copyright 2008-2024 O'TOOP PRODUCTS, LLC all rights reserved